


## LED Downlight Adjusted Recessed Round

### 1LARRxxx

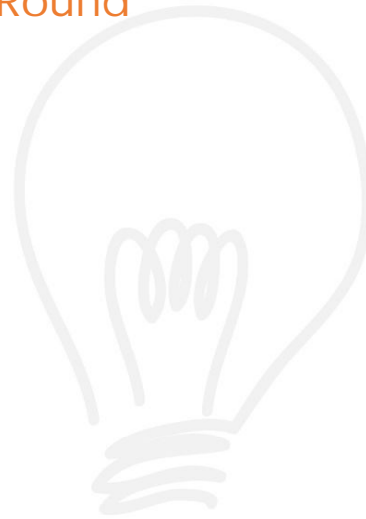

1LARR3X2

1LARR7X4

1LARR013

1LARR026

1LARR033

1LARR052

## Specification

Description	1LARR3X2	1LARR7X4	1LARR013	1LARR026	1LARR033	1LARR052
Dimension	 ø57mm x 41mm ⌀ 50mm (Cut out)	 ø57mm x 76mm ⌀ 50mm (Cut out)	 ø90mm x 95mm ⌀ 78mm (Cut out)	 ø134mm x 114mm ⌀ 123mm (Cut out)	 ø148mm x 159mm ⌀ 136mm (Cut out)	 ø148mm x 169mm ⌀ 136mm (Cut out)
Power Consumption	3.2W	7.4W	13W	26W	33W	52W
Beam Angle	24°, 36°	24°, 36°	15°, 28°, 40°	15°, 28°, 40°, 50°	15°, 30°, 55°	15°, 30°, 55°
Lumen(lm)	360 lm	630lm	1200lm	2360lm	3266lm	4417lm
OUTPUT	350 mA	700mA	350mA	700mA	1000mA	1400mA
CCT(K)	3000K, 4000K, 5000K					
LUX LEVEL @3m	99 lux(24°), 79 lux(36°)	166 lux(24°), 131 lux(36°)	454 lux(15°), 262 lux(28°), 208 lux(40°)	874 lux(15°), 670 lux(24°), 410 lux(40°), 302 lux(50°)	1659 lux(15°), 823 lux(30°), 348 lux(55°)	2256 lux(15°), 1092 lux(30°), 440 lux(55°)