


## LED Downlight Recessed Round

### 1LDRRxxx



1LDRR3X2

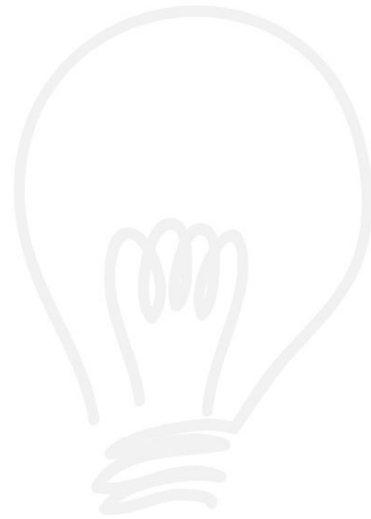

1LDRR7X4



1LDRR013



1LDRR026









1LDRR033



1LDRR052

## Specification

Description	1LDRR3X2	1LDRR7X4	1LDRR013	1LDRR026	1LDRR033	1LDRR052
Dimension	 ∅37mm(Cut out) ∅45mm x 30mm	 ∅37mm(Cut out) ∅45mm x 64mm	 ∅55mm(Cut out) ∅65mm x 76mm	 ∅90mm(Cut out) ∅100mm x 88mm	 ∅110mm(Cut out) ∅125mm x 125mm	 ∅118mm(Cut out) ∅125mm x 135mm
Power Consumption	3.2W	7.4W	13W	26W	33W	52W
Beam Angle	24°, 36°	24°, 36°	15°, 28°, 40°	15°, 24°, 40°, 50°	15°, 30°, 55°	15°, 30°, 55°
Lumen(lm)	360 lm	630lm	1200lm	2360lm	3266lm	4417lm
OUTPUT	350 mA	700mA	350mA	700mA	1000mA	1400mA
CCT(K)	3000K, 4000K, 5000K					
LUX LEVEL @3m	99 lux(24°), 79 lux(36°)	166 lux(24°), 131 lux(36°)	443 lux(15°), 265 lux(28°), 198 lux(40°)	899 lux(15°), 677 lux(24°), 396 lux(40°), 293 lux(50°)	1811 lux(15°), 876 lux(30°), 349 lux(55°)	2256 lux(15°), 1092 lux(30°), 440 lux(55°)

