


LED Downlight Adjusted Recessed Square Trimless

1LARSxxxTR

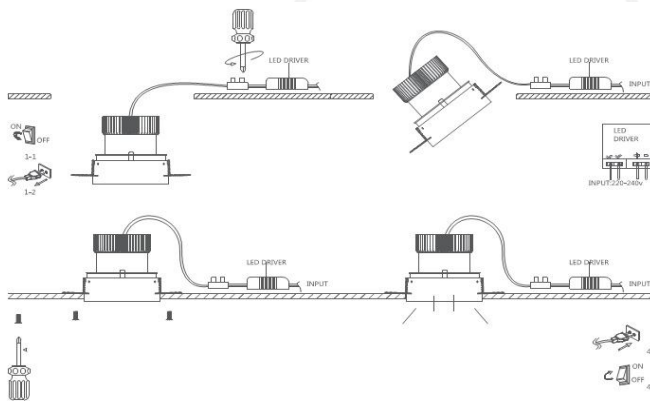

1LARS3X2TR 1LARS7X4TR 1LARS013TR 1LARS026TR 1LARS033TR 1LARS052TR

Specification

Description	1LARS3X2TR	1LARS7X4TR	1LARS013TR	1LARS026TR	1LARS033TR	1LARS052TR
Dimension	 60x60mm(Cut out) ø87mm x 75mm	 60x60mm(Cut out) ø87mm x 75mm	 94x94mm(Cut out) ø145.5mm x 76mm	 143x143mm(Cut out) ø191mm x 114mm	 154x154mm(Cut out) ø202mm x 155mm	 154x154mm(Cut out) ø202mm x 165mm
Power Consumption	3.2W	7.4W	13W	26W	33W	52W
Beam Angle	24°, 36°	24°, 36°	15°, 28°, 40°	15°, 28°, 40°, 50°	15°, 30°, 55°	15°, 30°, 55°
Lumen(lm)	360 lm	630lm	1200lm	2360lm	3266lm	4417lm
OUTPUT	350 mA	700mA	350mA	700mA	1000mA	1400mA
CCT(K)	3000K, 4000K, 5000K					
LUX LEVEL @3m	99 lux(24°), 79 lux(36°)	166 lux(24°), 131 lux(36°)	454 lux(15°), 262 lux(28°), 208 lux(40°)	874 lux(15°), 670 lux(24°), 410 lux(40°), 302 lux(50°)	1659 lux(15°), 823 lux(30°), 348 lux(55°)	2256 lux(15°), 1092 lux(30°), 440 lux(55°)