


LED Downlight Recessed Round Tight Trim

1LDRRxxxT

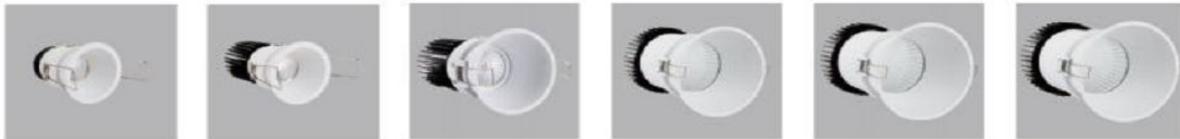

1LDRR3X2T

1LDRR7X4T

1LDRR013T

1LDRR026T

1LDRR033T

1LDRR052T

Specification

Description	1LDRR3X2T	1LDRR7X4T	1LDRR013T	1LDRR026T	1LDRR033T	1LDRR052T
Dimension	 45mm (Cut out) 40mm x 45mm	 40mm (Cut out) 45mm x 79mm	 77mm (Cut out) 82mm x 115mm	 108mm (Cut out) 115mm x 141mm	 123mm (Cut out) 135mm x 188mm	 128mm (Cut out) 135mm x 198mm
Power Consumption	3.2W	7.4W	13W	26W	33W	52W
Beam Angle	24°, 36°	24°, 36°	15°, 28°, 40°	15°, 24°, 40°, 50°	15°, 30°, 55°	15°, 30°, 55°
Lumen(lm)	360 lm	630lm	1200lm	2360lm	3266lm	4417lm
OUTPUT	350 mA	700mA	350mA	700mA	1000mA	1400mA
CCT(K)	3000K, 4000K, 5000K					
LUX LEVEL @3m	102 lux(24°), 79 lux(36°)	171 lux(24°), 134 lux(36°)	457 lux(15°), 275 lux(28°), 210 lux(40°)	927 lux(15°), 702 lux(24°), 415 lux(40°), 305 lux(50°)	1819 lux(15°), 952 lux(30°), 416 lux(55°)	2062 lux(15°), 1073 lux(30°), 466 lux(55°)