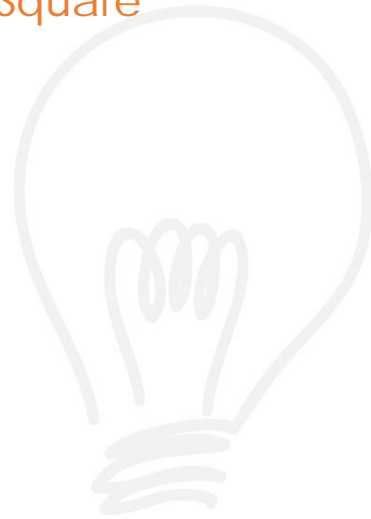
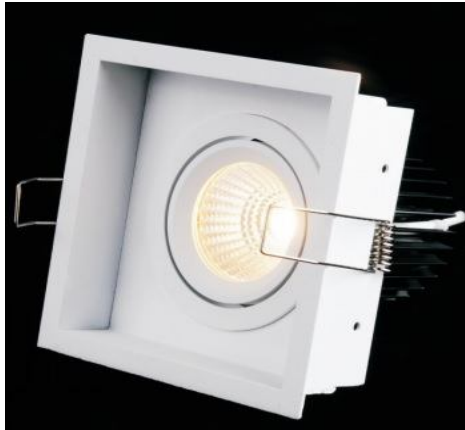


## LED Downlight Adjusted Recessed Square

### 1LARSxxx



**1LARS3X2**

**1LARS7X4**







**1LARS013**

**1LARS026**

**1LARS033**

**1LARS052**

## Specification

Description	1LARS3X2	1LARS7X4	1LARS013	1LARS026	1LARS033	1LARS052
Dimension	 60x60mm(Cut out) ø65mm x 41mm	 76x76mm(Cut out) ø65mm x 76mm	 96x96mm(Cut out) ø108mm x 99mm	 143x143mm(Cut out) ø157mm x 115mm	 154x154mm(Cut out) ø164mm x 156mm	 154x154mm(Cut out) ø164mm x 166mm
Power Consumption	3.2W	7.4W	13W	26W	33W	52W
Beam Angle	24°, 36°	24°, 36°	15°, 28°, 40°	15°, 28°, 40°, 50°	15°, 30°, 55°	15°, 30°, 55°
Lumen(lm)	360 lm	630lm	1200lm	2360lm	3266lm	4417lm
OUTPUT	350 mA	700mA	350mA	700mA	1000mA	1400mA
CCT(K)	3000K, 4000K, 5000K					
LUX LEVEL @3m	99 lux(24°), 79 lux(36°)	166 lux(24°), 131 lux(36°)	454 lux(15°), 262 lux(28°), 208 lux(40°)	874 lux(15°), 670 lux(24°), 410 lux(40°), 302 lux(50°)	1659 lux(15°), 823 lux(30°), 348 lux(55°)	2256 lux(15°), 1092 lux(30°), 440 lux(55°)