

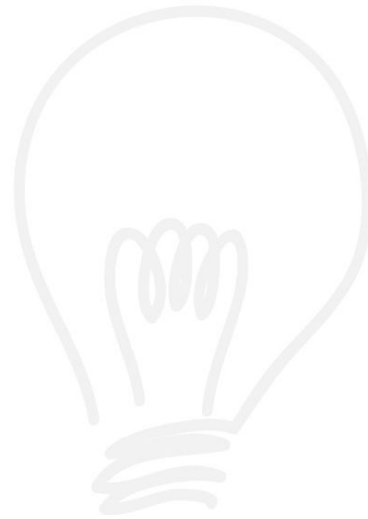




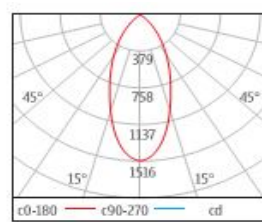


LED Downlight Surfaced Square

1LDSS013



Photometric Diagram



Specification

- Single Color (CCT 3000K,4000K,6000K)
- IP20
- Output 350 mA
- Power Consumption 13W
- Beam Angle 15°, 30°, 55°
- Luminous Flux 1200 lm
- 30,000 hrs average life time
- Operation Temp : -20°C ~ 50°C

